



# DATA SHEET

## JEMCO



الکتروموتور ۱۵ کیلووات ۱۵۰۰ دور ماشینهای الکتریکی جوین (جمکو)

**Subject: Low voltage squirrel cage induction motors**


Customer			Manufacturer <b>Jemco</b>		
Motor Type <b>YD1161-4AO</b>		Average sound pressure level		No load	load
Frame Size <b>160L</b>	Number of poles <b>4</b>				
Mounting design <b>IM B3</b>	Type of encloser <b>IP55</b>		Direction of rotation <b>both</b> <input type="checkbox"/> CW <input type="checkbox"/> CCW <input type="checkbox"/>		
EX-Protective system <b>safe</b>			Bearing DE/NDE <b>6309-c3/6309-c3</b>		
Duty type <b>S1</b>	Starting		Lubrication <b>Li Base Grease</b>		
Ambient Temperture	<b>40 C</b>		Type of lubrication <b>K3N Din 51825</b>		
Thermal classification <b>F</b>	Tempertur rise <b>B</b>		typical Test <b>IEC60034-1</b>		
Term motor protection <b>optional</b>			outline dimention drawing No. <b>available</b>		
Retad output <b>15KW</b>			Location of Terminal Box <b>top</b>		
rated voltage <b>380V</b>			Number of terminals <b>6</b>		
connection <b>DELTA</b>			space heater <b>optional</b>		
Ferquency <b>50 HZ.</b>	speed <b>1454 rpm</b>		Net weight approx. <b>144 Kg</b>		
Rated current <b>30 A</b>			painting <b>RAL 7032</b>		
Starting Current $(I_A/I_N)$ <b>7</b>			Termal Protection <b>optional</b>		
Power Factor	<b>4/4</b>	<b>3/4</b>	<b>1/2</b>	Additional Sensor <b>optional</b>	
	<b>0.85</b>			Frame Material <b>cast iron</b>	
Efficiency	<b>4/4</b>	<b>3/4</b>	<b>1/2</b>		
	<b>89.5</b>				
Rated torque $(T_N)$ <b>99 Nm</b>			Additional data and remarks: 1- permisslbie percentage Voltage imbalance not greater than 1% 2-Cold Starting per Hour(3) 3- Hot Starting per Hour(2) 4- Maximum Hot starting Time not more than 60 second 5- Maximum cold Time not more than 80 second		
starting torque $(T_s/T_N)=$ <b>2.2</b>					
Break-down torque $(T_{max}/T_N)=$ <b>2.8</b>					
Rotor class/material <b>squirrel cage</b> <b>Aluminium</b>					
Rotor voltage	Rotor current				
Moment of inertia <b>0.052 Kgm2</b>					
cooling method <b>IC411</b>					
altitude of instalation <b>1000m</b>					
Date	Name	Tolerances acc. To		NO.	
Designed					
checked					

# YD1161-4A0

15KW-1500RPM  
160L



PARS TEHRAN ENG. CO.

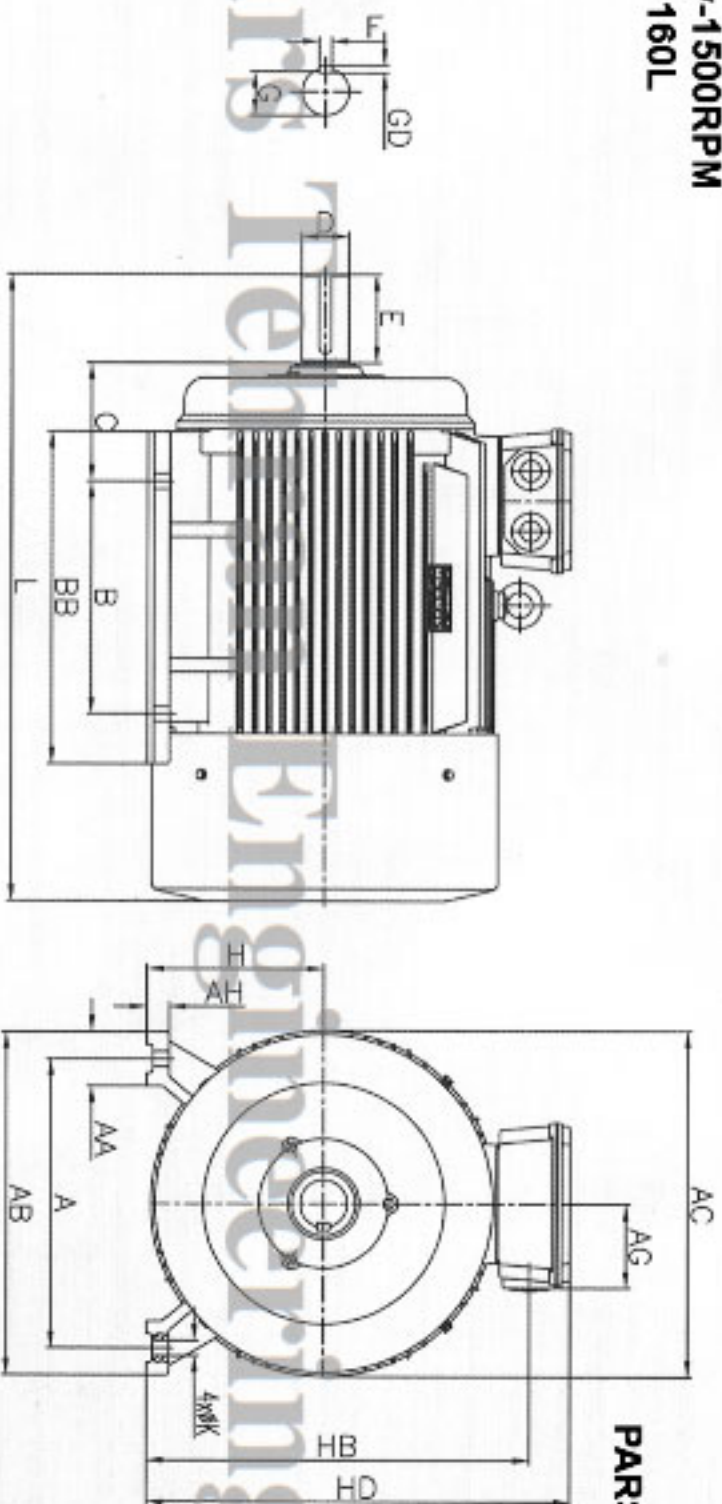

For motor

Dimension symbols to

Frame size	Type NO.	poles	H	A	B	C	D	E	F	G	GD	K	AA	AB	BB	AC	AG	HA	HD	L	HB
160L	YD1161-4A0	4	160	254	210	108	42	110	12	45	8	15	68	317	262	317	95	21	419	652	369

