



DATA SHEET

JEMCO



الکتروموتور ۳۷ کیلووات ۳۰۰۰ دور ماشینهای الکتریکی جوبین (جمکو)

Subject: Low voltage squirrel cage induction motors


Customer			Manufacturer Jemco					
Motor Type		YD1202-2AO		Average sound pressure level	No load	load		
Frame Size	200L2	Number of poles	2					
Mounting design	IM B3	Type of encloser	IP-55	Direction of rotation both <input type="checkbox"/> CW <input type="checkbox"/> CCW <input type="checkbox"/>				
EX-Protective system	safe	Bearing DE/NDE		6312-c3/6312-c3				
Duty type	S1	Starting	Lubrication Li Base Grease					
Ambient Temperature	40 C		Type of lubrication K3N Din 51825					
Thermal classification	F	Tempertur rise	B	typical Test IEC60034-1				
Term motor protection	optional		outline dimention drawing No. available					
Retad output	37 KW			Location of Terminal Box top				
rated voltage	380V		Number of terminals 6					
connection	DELTA		space heater optional					
Ferquency	50 HZ.	speed	2956 rpm	Net weight approx. 223 Kg				
Rated current	70 A		painting RAL 7032					
Starting Current	(I_A/I_N)		7	Ternal Protection optional				
Power Factor	4/4	3/4	1/2	Additional Sensor optional				
	0.87	Frame Material cast iron						
Efficiency	4/4	3/4	1/2	Additional data and remarks: 1- permisslbie percentage Voltage imbalance not greater than 1% 2- Cold Starting per Hour(3) 3- Hot Starting per Hour(2) 4- Maximum Hot starting Time not more than 60 second 5- Maximum cold Time not more than 80 second				
	91.5							
Rated torque	(T_N)		120 Nm					
starting torque	$(T_s/T_N)=$		2.2					
Break-down torque	$(T_{max}/T_N)=$		2.8					
Rotor class/material	squirrel cage		Aluminium					
Rotor voltage	Rotor current							
Moment of inertia	0.152Kgm2							
cooling method	IC411							
altitude of instalation	1000m							
	Date	Name	Tolerances acc. To		NO.			
Designed								
checked								

YD1202-2A0

37KW-3000RPM
200L



PARS TEHRAN ENG. CO.

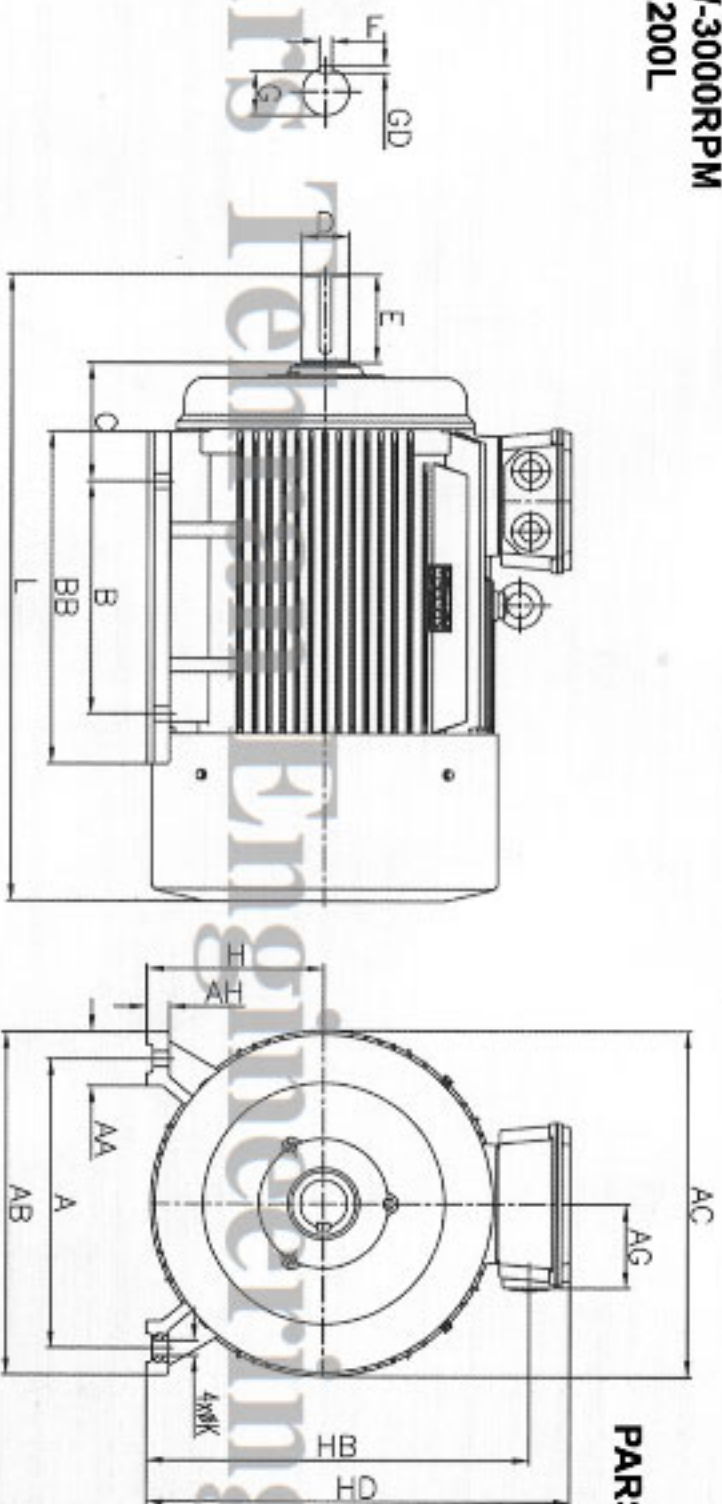

For motor

Dimension symbols to

Frame size	Type NO.	poles	H	A	B	C	D	E	F	G	GD	K	AA	AB	BB	AC	AG	HA	HD	L	HB
200L	YD1202-2A0	2	200	318	305	133	55	110	16	59	10	18.5	70	388	368	397	116	25	504	762	449

